

RM6 2G ALE Option

2nd Generation ALE



Automatic Link Establishment

- MIL-STD-188-141B App. A
- FED-STD 1045
- Individual Calls
- Group, Net Calls
- All, Any, Wildcard Call
- AMD, DTM, UUF
- Sounding
- Scanning (2 or 5 chan./sec)
- Automatic channel selection

Linking Protection

- MIL-STD-188-141B App. B
- FED-STD 1049
- Security Level (AL-1, AL-2)
- Time Exchange

Link Set-up

The **2G ALE** Controller is embedded in the **RM6** unit and can be activated after installing the appropriate *RapidM* license key.

Embedded ALE allows linking with other HF stations without operator intervention. A number of frequencies can be used to overcome variable HF propagation conditions.

The ALE Controller performs all the basic protocol functions for individual calling, one-to-many calling, sounding and scanning up to 5 channels per second.

For link set-up the **2G ALE** Controller calls first on channels with the best LQA score. The LQA is obtained by continuously listening to sounds and calls from other stations.

MIL-STD-188-141B, App. A has mandatory requirements for Occupancy Detection and Listen before Transmit (**2nd Generation ALE**).

Linking Protection

MIL-STD-188-141B, App. B Linking Protection requires a Time Server in the network. The **RM6** unit has a dedicated interface to connect a standalone GPS unit. Upon connection, the date & time display will automatically update to UTC.

The **RM6** supports the standard Time Exchange protocol. This will raise the time quality of non-GPS capable Time Client stations.

Features

- Menu-Driven ALE Setup
- User-Friendly control and configuration
- Front panel short messaging (AMD)
- Works with RC66-P (STANAG 5066)
- Built-in Radio Control Protocols
- Link Quality Analysis (LQA)
- SINAD / BER Thresholds
- LQA Polling
- Automatic Hand-Off to Modem
- GPS Time updates
- ALE Remote Control Capability
- Emergency Operator break-in

Radios Supported

The control protocols for various radios are embedded (selectable from the front panel).

The following radios are currently supported:

- Rohde & Schwarz XK2000 family
- Yaesu System 600
- Vertex Standard 600
- Barrett 950, 2050
- ICOM Amateur and Marine
- Kenwood TS-50, TS-480, TS-2000
- SGC 2000 Power Talk 150
- JRC JSB-196GM (High-sea)

New radio types are added from time to time on customer request.

Control

The unit is fully controllable from the front panel with a super-quick menu or via remote control.

ALE Network

Using an ALE network over a number of frequencies offers a much higher level of connectivity compared with using a single frequency. This is where ALE can substantially upgrade the availability of service.

When not otherwise committed, the ALE Controller continually scans the pre-selected set of channels, listening for calls.

When the self address is detected and a link is established, data or voice communications are automatically initiated by switching the chosen high speed data modem into the circuit.

The ALE Controller can initiate a sounding signal at programmable intervals. Received sounding broadcasts are used to evaluate the connectivity and availability of links for later use.

ALE Configuration

To assist with the configuration of ALE networks, RapidM provides **2G ALE configuration** PC software, which will clone a basic configuration onto a number of **RM6** units, leaving only the self address parameters to be set individually.

Finally, the ALE configuration can be remotely updated, and saved in one of twenty available

custom preset memories in the **RM6** unit. All the **2G ALE** configuration parameters are factored into checksums so that ALE settings can be verified between network nodes.

User Permissions

OPERATOR

The 'Operator' is restricted to the operational screens and ALE control menu.

ALE NETWORK ADMINISTRATOR

The 'ALE Network Administrator' determines the ALE Network parameters and configures all the ALE Controllers in the ALE Network.

The entire **2G ALE** configuration is protected by the ALE Network Administrator's password.

RM4 Mobile ALE


If a particular mobile HF radio is not ALE capable, the **RM4** unit can be used as an external ALE Controller for the radio in the future (availability Q1 2006).

For mobile use, the ALE addressing is done with a DTMF microphone connected to the **RM4** front panel.

STANDARD	CHARACTERISTICS
2G ALE MIL-STD-188-141B APPENDIX A, B & FED-STD 1045 FED-STD 1049	Automatic Link Establishment 2 nd Generation (2G ALE) <i>Occupancy detection waveforms:</i> MS 110A/B, S 4539, S 4285, S 4415, S 4529, S 4481, 8-FSK and SSB Voice <i>Protocol:</i> Calling, AMD, DTM, <i>Excluding:</i> DBM, AQC-ALE <ul style="list-style-type: none"> • Programmable Radio Selection • Link Quality Analysis (LOA) • Scanning (2 or 5 channels per second) • Automatic Sounding • Automatic Hand-Off to Internal Modem • User-Friendly, Menu-Driven • Linking Protection up to AL-2 (Appendix B). Can use GPS interface for Time reference

The **RM6** unit comes standard with modem waveforms (see *RapidM HF High-Speed Data Modem* brochure).

Fig2:
Rear panel
of the **RM6**
Unit

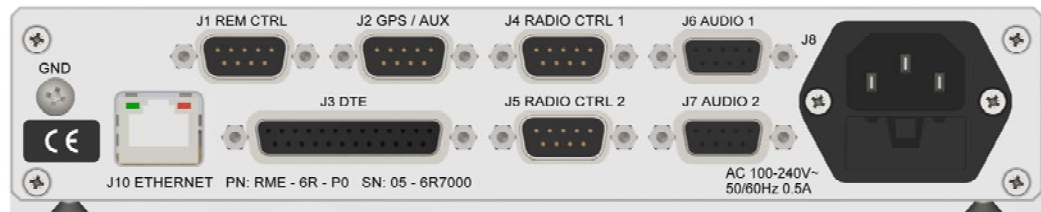

Apex Corporate Park
 Quintin Brand Street
 Perseus Park
 Pretoria, South Africa
 0020

Rapid Mobile Pty (Ltd)
Tel: +27 (0) 12 349 0000
Fax: +27 (0) 12 349 0010
e-mail: info@rapidm.com
web: www.rapidm.com