

# RC12

## Wideband ARQ & IP Controller – 240 kbps



S4591 MELP 1200/2400

S4691 MARLIN – 48 kHz

S5066 WB-ARQ Ed 4

PRODUCT OVERVIEW

### Features

- **Embedded Function**
  - STANAG 4691, Annex A: MARLIN Controller ( $\leq 240\,000$  bps)
- **Product Interfaces**
  - DTE Data: Connects to COMSEC, Synchronous / Async, serial I/F
  - Ethernet Remote Control: Connects to Management System, Eth. I/F
  - Ethernet Auxiliary Data: Connects to Data Applications, Eth. I/F
  - Ethernet Data: Alternative DTE connection to Modem, Eth. I/F
  - GPS: Accurate time updates from external GPS
  - Network Time: Accurate time updates via NTP time server
- **STANAG 4691 MARLIN Controller Features**
  - HF ELOS (48 kHz) Data Rates:  $\leq 240\,000$  bps
  - IPv4 Support: IPv4 data transfer over HF ELOS
  - Single-Hop Support: Point-to-Point packet delivery (no relaying)
  - Multi-Hop Support: Packet delivery via MANET relaying
  - Reliable Data Transfer: Error-free data transfer using ARQ protocol
  - Collision Avoidance: Synchronous Time-Division Multiple Access slots
  - Adaptive Data Throughput Control: Dynamic bandwidth allocation
  - Automatic Neighbour Discovery: MANET relay controller
  - Radio Silence: Tx Inhibit
  - Deployment: Mobile and Fixed station (split-site support)
  - Installation Type: Pure Red/Black
  - Interoperability: Proven interoperability

### STANAG 4691 MARLIN

STANAG 4691, also known as “Mobile Ad hoc Relay Line of Sight Networking” (MARLIN), is a NATO specification designed to facilitate Internet Protocol (IP) data transfers in multi-node, multi-hop dynamic networks employing V/UHF Line-Of-Sight (LOS) and HF Extended Line-Of-Sight (ELOS) radio circuit networks.

In environments where SATCOM availability is constrained due to equipment limitations, cost considerations or SATCOM-denied areas, MARLIN’s utilisation of HF LOS and V/UHF ELOS emerges as a practical alternative. Furthermore, the widespread availability of legacy tactical voice radios that support HF and UHF bands could be utilised to transport IP data using STANAG 4691 (MARLIN).

MARLIN radio circuit networks offer interoperability of allied forces by allowing the exchange of tactical data with all sea-surface, sub-surface, airborne (mobile) and land (fixed) platforms.

### STANAG 4691 MARLIN Controller

The RC12’s MARLIN controller conforms to the STANAG 4691, Annex A, by providing functionalities, such as automatic network discovery, collision avoidance, error-free data delivery using the embedded ARQ protocol, multi-hop Mobile Ad-hoc Networking (MANET) operation and slot merging for adaptive data throughput control.

For the Rapid Mobile STANAG 4691 MARLIN HF solution, the RC12 is utilised in conjunction with the narrowband and wideband HF waveforms provided by the RM12. A link encryption module may be connected between the controller and modem. Typically, an IP router connects to the RC12 controller, while an HF radio interfaces with the RM12 modem.

The RC12’s utilises the following RM12 embedded waveforms during STANAG 4691 operations:

- HF ELOS MIL-STD-188-110D (24 kHz),  $\leq 120\,000$  bps
- HF ELOS MIL-STD-188-110D (48 kHz),  $\leq 240\,000$  bps

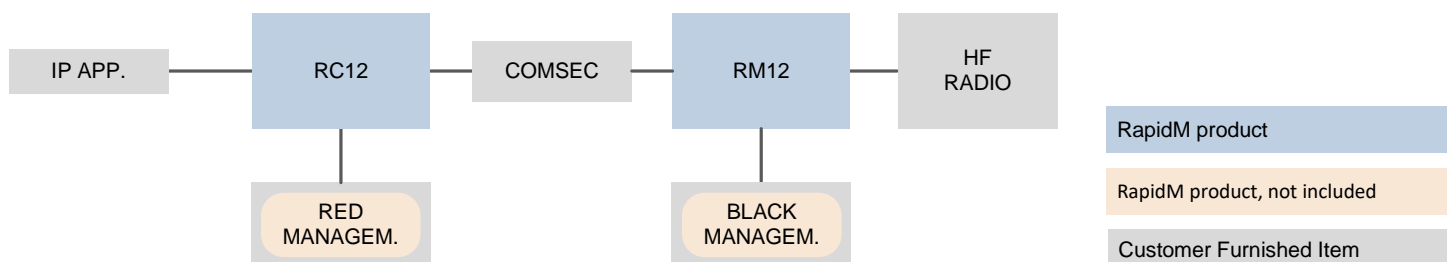


Figure 1: HF Radio Circuit Architecture

## Concepts Of Operation

The MARLIN controller utilises a synchronous Time Division Multiple Access (TDMA) scheme called Distributed Slot Reservation Media Access (DSRMA). Each MARLIN node, except during Radio Silence, maintains a fixed allocation of time slots in each frame. The number of allocated slots per node adjusts automatically based on data demands through a dynamic bandwidth allocation mechanism.

Developed initially to facilitate connectivity among ships at sea and slow-moving aircraft using LOS V/UHF radio links, the STANAG 4691 MARLIN standard has evolved. Nowadays, the STANAG 4691 MARLIN controllers are also often deployed on surface ships for ELOS radio communication based on HF surface wave propagation.

The illustration below depicts an example of a STANAG 4691 MARLIN maritime network topology consisting of UHF LOS (blue) and HF ELOS (yellow) subnets. Direct ship-to-ship connections between network participants are established by connecting MARLIN LOS/ELOS bearers directly to the platform's wireless routers. Unicast or multicast data transmissions occur among node members within the network. Connections between two subnetworks are possible when a platform supports both UHF and HF radio communications.

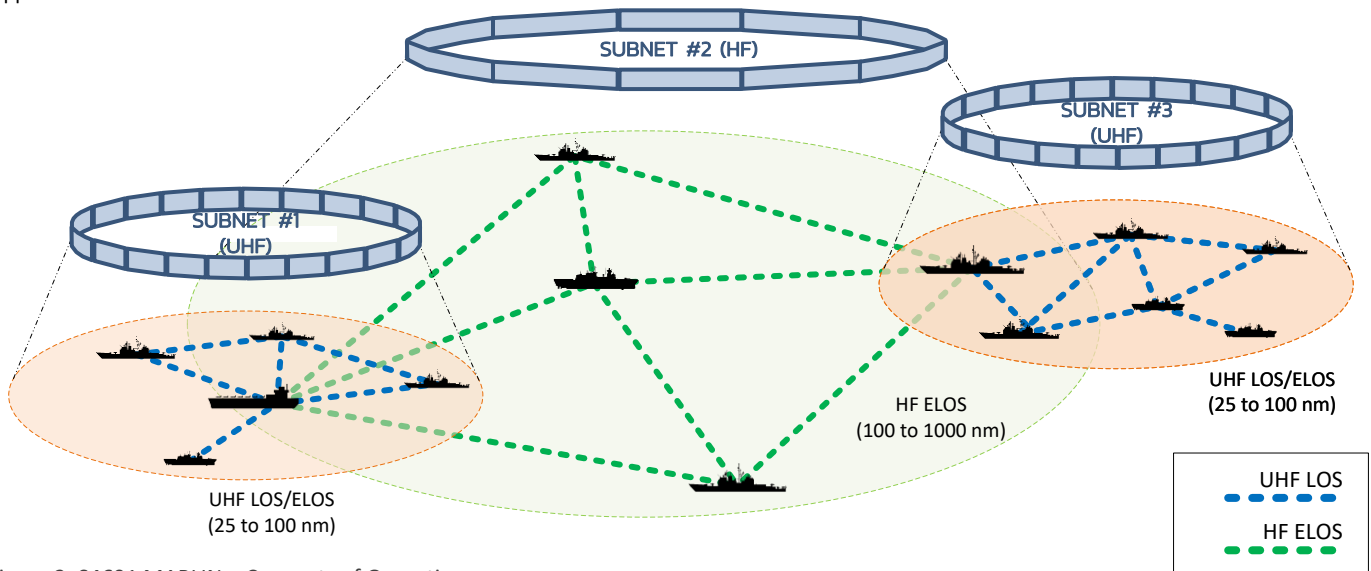


Figure 2: S4691 MARLIN – Concepts of Operation

## Conformance To STANAG 4691 Ed. 1 Annex A

The table below provides a summary of the RC12's conformance to the STANAG 4691 Edition 1, Annex A standard. The Annex A provides the specification of the MARLIN controller.

Conformance with STANAG 4691 Edition 1, Annex A					
<b>A.1</b>	Introduction (information)	✓	<b>A.6</b>	MAC Reliability – Hop by hop ARQ	✓
<b>A.2</b>	Router Interface	✓	<b>A.7</b>	Physical Interface (data rate ≤ 96 kbps)	✓
<b>A.3</b>	Link Layer Control	✓	<b>A.8</b>	PDU and Header Formats	✓
<b>A.3.x</b>	Data Priority, Compression/Decompression, Packet Fragmentation & Reassembly, Duplicate Detection and Time Slot Filling, Queue Reporting.	✓	<b>A.8.x</b>	STU Header, MAC Management PDU, MAC ACK Packets, MAC Data Header, LLC Header and Relay Control PDU.	✓
<b>A.4</b>	Relay Control	✓	<b>APP A.1</b>	Expected Operational Requirements	✓
<b>A.4.x</b>	Packet Transmission/Processing, Multi-point Relay Selection, Data Relay.	✓	<b>APP A.2</b>	16-BIT Cyclic Redundancy Check	✓
<b>A.5</b>	Media Access Control	✓	<b>APP A.3</b>	Random Access Slot Position	✓
<b>A.5.x</b>	Types of Neighbors, TDMA Timing, Slot Merging, Types of Slots, Dynamic Bandwidth Allocation, Slot Request/Approval, Network Organization and Link Quality Sensing.	✓	<b>APP A.4</b>	Abbreviations and Acronyms (information)	✓

Annex B describes the data modem waveforms for operation in 25 kHz (96 kbps) as provided in the RM12 Wideband SDM & ALE product. The S4691 Annex A, MARLIN controller function is unlocked via the optional CU activation key.

## RC12 Ordering Information (STANAG 4691 Focus)

RC12 Ordering Information	Stock Number	Description
RC12 Hardware, S4691 MARLIN Controller (CU)	RME-C2-RA-CUV06	SDC: RC12 CU (4691-A Ctrl 240 kbps) V06

Rapid Mobile (Pty) Ltd is a world-leading business-to-business supplier of digital radio communication technology. We produce data modems, embedded modules and related technology for use with HF and V/UHF radios. Reproduction or transmission of this document in any form without prior consent from RapidM is prohibited. All information and technical specifications are subject to change without prior notice.

@ info@rapidm.com  
 +27 12 349 0000  
 https://www.rapidm.com/

**RapidM**  
 Copyright © 2024 Rapid Mobile (Pty) Ltd  
 Revision: RC12\_S4691\_EN\_03F

## HF ELOS MARLIN Deployment

ELOS communication primarily relies on surface and ground waves:

- HF ELOS Range – 350 km
- Unlike sky wave propagation, as used in Beyond Line-Of-Sight (BLOS), HF surface wave propagation offers reliable and predictable communication channels unaffected by ionospheric conditions and solar cycles.
- Compared to HF BLOS, the limited range of HF ELOS provides added advantages by reducing adjacent area interference and simplifying frequency reuse requirements.
- Communication over these HF surface radio links typically does not utilise Automatic Link Establishment (ALE) which is commonly employed to address the issue of frequency selection.

## UHF LOS MARLIN Deployment

LOS communication primarily relies on direct waves:

- UHF LOS Range – 30 km (influenced by operating frequency, power level, antenna height and terrain obstructions).

The RC34 Ultra-Wideband Network Controller and RM34 Ultra-Wideband SDM / 70 MHz products are recommended for UHF LOS MARLIN radio systems.